

VE882/VE892


HDMI Optical Extender

- The VE882/VE892 is an Optical HDMI Extender that overcomes the length restriction of standard HDMI cables by using optical fiber to send high definition audio and video signals over large distances.

The VE882/VE892 accepts an audio-video stream from a local source and serializes the data to pass it over a single 3.125 Gbps optical link (for resolutions up to 1080p@60Hz at 24-bits)


The VE882/VE892 can also extend the IR remote control and transfer RS-232 (up to 115kbps) in both directions, allows you to connect serial devices such as touch screens and barcode scanners.

HDMI™
HIGH DEFINITION MULTIMEDIA INTERFACE

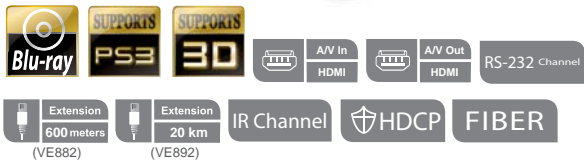

Features

- Extends the transmission range of HDMI, IR and RS-232 signals using one fiber optic cable
- Very long distance transmission – up to 600m for VE882, up to 20km for VE892*
- HDMI (3D, Deep Color), HDCP compatible – signaling rates up to 3.125 Gbits
- Superior video quality – up to 1080p@60Hz
- Uses one fiber optic cable to connect the local and remote units
- Supports wide screen formats
- Built-in 8KV/15KV ESD protection
- Features RS-232 serial port for connecting peripherals such as touch screens, barcode scanners, etc.
- Supports bi-directional IR signal transmission, one way at a time
- Rack-mountable
- Hot-pluggable

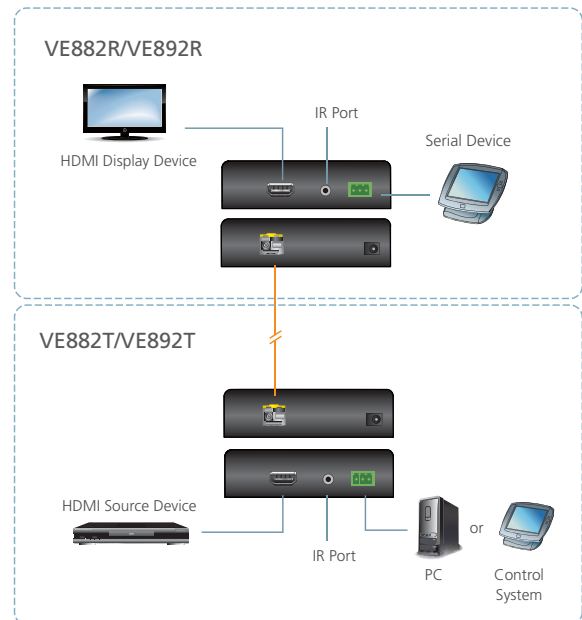

Specification

Function		VE882T/VE892T	VE882R/VE892R
Connectors	HDMI In	1 x HDMI Type A Female (Black)	N/A
	HDMI Out	N/A	1 x HDMI Type A Female (Black)
	Optical In/Out	1 x LC Simplex Connector (SFP) (Bi-directional)	
	RS-232	1 x Terminal Block, 3 pole	
	IR	1 x mini stereo jack (Black)	
	Power	1 x DC Jack (Black)	
	Fiber Optics	Operating distance*	VE892: 20 km with single mode (SM) fiber VE882: 600 m with single mode (SM) fiber
Wavelength		1310/1550 nm for SM	
Data rate		Single fiber: 1080p/60Hz (24-bits, 3.125G bps)	
LEDs	Power/Link	1 (Green)	
Power Consumption		DC5.3V, 5.6W	DC5.3V, 5.1W
Environment	Operating Temp.	0–50°C	
	Storage Temp.	–20–60°C	
	Humidity	0–80% RH, Non-condensing	
Physical Properties	Housing	Metal	
	Weight	0.42 kg	0.42 kg
	Dimensions (L x W x H)	14.69 x 10.30 x 3.00 cm	14.69 x 10.30 x 3.00 cm

*Note: Operating distance is approximate. These are typical maximum distance that may vary depending on factors such as fiber type, fiber bandwidth, connector splicing, losses, modal or chromatic dispersion, environmental factors, and kinks.

ATEN International Co., Ltd.

3F., No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan
Phone: 886-2-8692-6789 Fax: 886-2-8692-6767
www.aten.com E-mail: marketing@aten.com

Printed 05/2014 V2.0



© Copyright 2014 ATEN® International Co., Ltd.
ATEN and the ATEN Logo are trademarks of ATEN International Co., Ltd.
All rights reserved. All other trademarks are the property of their respective owners.