


# CS1208A/CS1216A

## 8/16-Port PS/2 KVM Switch

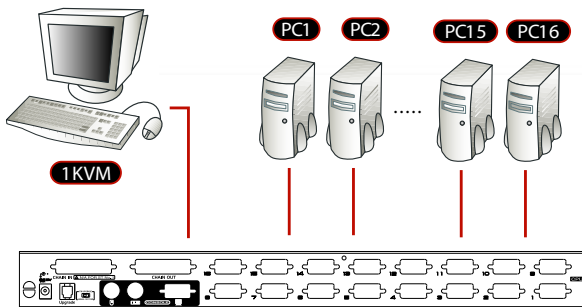

### Features:

- A Single Console Controls Up to 8/16 Computers
- Daisy Chain Up to 31 Additional Units to Control Up to 512 Computers
- Auto-Sensing of Station Position on Daisy Chained Installation
- Intelligent OSD (On Screen Display) and Hotkey Switching for Efficient System Handling
- OSD Is Mouse Driven for Quick and Convenient Navigation of The Menus
- Administrator/User Password Security Protection (PSP)
- Keyboard and Mouse Emulation for Error Free Booting
- DDC Emulation - VGA Settings of Every Connected Computer Are Automatically Adjusted for Optimal Output
- Hot Pluggable Allowing Add or Remove Computers without Powering Down The Switches
- Firmware upgradable to all stations simultaneously via chain

### Specifications:

Functions		CS-1208	CS-1216
Computer Connections		Direct 16 Max 512 (via Daisy Chain)	
Port Selection		OSD (On Screen Display); Hotkey	
LEDs		On Line Port x 8	On Line Port x 16
		Selected Port x 8	Selected Port x 16
		Station ID 2 x 7 Segments	
		Power x 1	
Console Connectors	Keyboard	1 x 6 pin mini-DIN F	
	Mouse	1 x 6 pin mini-DIN F	
	Video	1 x HDB-15 F	
Computer Port Connectors		8 x SPDB-15 F	16 x SPDB-15 F
Daisy Chain Ports		1 x DB-25 M 1 x DB-25 F	
Upgrade Port		1 x RJ-11 F	
Scan Interval (OSD Select)		User Specified: 1 - 255 secs.	
Emulation	Keyboard	PS/2	
	Mouse	PS/2	
Video		1920 x 1440; DDC2B	
Power Consumption		DC 9V; 7.5W (max.)	DC 9V; 8W (max.)
Operating Temperature		0 - 50 °C	
Storage Temperature		-20 - 60 °C	
Humidity		0 - 80% RH	
Housing		Metal	
Weight		2830 g	
Dimensions (L x W x H)		483 x 155 x 45 mm (19" 1U)	

## ATEN North America



ATEN Technology  
19641 Da Vinci, Foothill Ranch, CA 92610  
Phone: 888.999.ATEN (2836) Fax: 949.428.1100

ATEN New Jersey - SI/VAR Division  
155 Pierce Street, Somerset, NJ 08873  
Phone: 888.999.ATEN (2836) ext. 2300 Fax: 732.356.1639

Email: [sales@aten-usa.com](mailto:sales@aten-usa.com)

Website: [www.aten-usa.com](http://www.aten-usa.com)

