

## DS-2CC12D9T(-A)



### Key Features

- 2 Megapixel high-performance CMOS
- Analog HD output, up to 1080P resolution
- True Day/Night
- OSD menu, 3D DNR, Smart IR
- True WDR, up to 120dB
- UTC function(Pelco C protocol)
- 24V AC/ 12V DC(-A)

### Specification


Model	DS-2CC12D9T(-A)
Parameter	1080p IR Analog HD Box Camera
<b>Camera</b>	
Image Sensor	1/3" Progressive Scan CMOS
Signal System	PAL/NTSC
Effective Pixels	1920(H)*1080(V)
Min. Illumination	Color : 0.01 Lux @(F1.2,AGC ON) B/W : 0.001 Lux @(F1.2,AGC ON)
Shutter Time	1/25 s to 1/50,000 s
Lens Mount	C/CS mount
Auto-iris	DC drive
Day & Night	ICR
Synchronization	Internal synchronization
WDR	120dB
Video Frame Rate	1080p@25fps/1080p@30fps

HD Video Output	1 Analog HD output
CVBS Output	1Vp-p Composite Output(75Ω/BNC)
S/N Ratio	More than 52dB
<b>Menu</b>	
Scene	Indoor, Outdoor, Indoor1, LOW-LIGHT
Camera ID	On/off (15 characters, position programmable)
AGC	Support
D/N Mode	Color/BW/EXT
White Balance	ATW, AWC-SET, Indoor, Outdoor, Manual
Privacy Mask	On/Off, maximum 8 zones
Motion Detection	On/Off, maximum 4 zones
BLC	Support
Anti-flicker	On/off
Language	English, Japanese, CHN1, CHN2, Korean, German, French, Italian, Spanish, Polish, Russian, Portuguese, Dutch, Turkish, Hebrew and Arabic
Functions	Eclipse, Digital noise reduction, Digital zoom(62x), Slow shutter, Mirror, Defog, Defect pixel correction, SMART D-ZOOM
<b>General</b>	
Working Temperature/Humidity	-30 °C – 60 °C (-22 °F – 140 °F) Humidity 90% or less (non-condensing)
Power Supply	12V DC -A: 24V AC, 12V DC
Power Consumption	Max. 4W -A: Max. 4.5W
Communication	Up the coax(need UTC controller) Protocol: Pelco-C(Coaxitron)
Dimensions	69.2×57.3×148.7mm(2.7" × 2.3" × 5.85")
Weight	830 g (1.83 lbs)

## Order Model

DS-2CC12D9T, DS-2CC12D9T-A

## Dimension

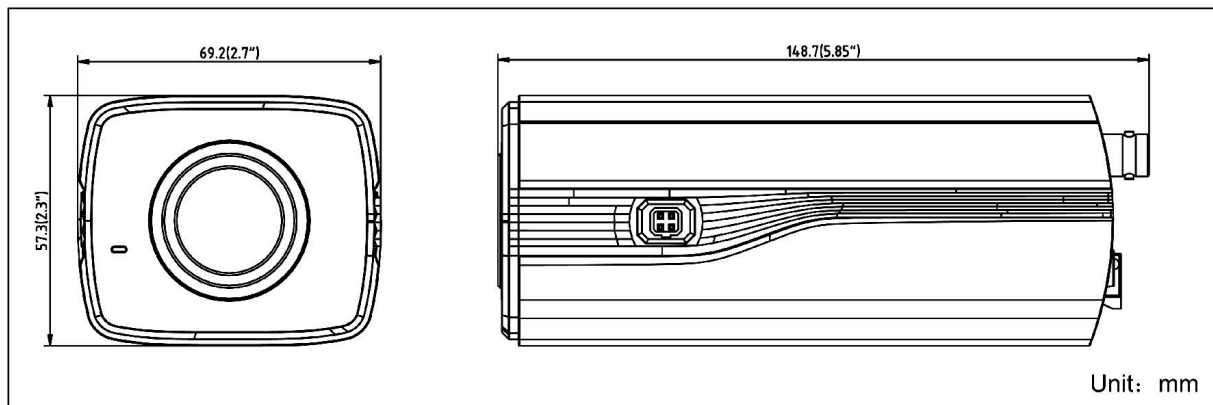

## Lens



HV3816D-8MPIR Auto Iris  
Manual Focusing 8MP HD Lens



HV1140D-8MPIR Auto Iris  
Low illumination  
Manual Focusing 8MP IR Lens



TV2810D-MPIR Auto Iris  
Manual Focusing 3MP IR Lens

## Accessories



DS-1322HZ-C Outdoor Housing



DS-1293ZJ Wall Mounting  
Outdoor(with housing)



DS-1292ZJ Wall Mounting  
Indoor